


Delta

SELF-TIGHTENING WIRE-TYPE BARN CLEANERS FOR BARN WITH OPEN CHANNELS

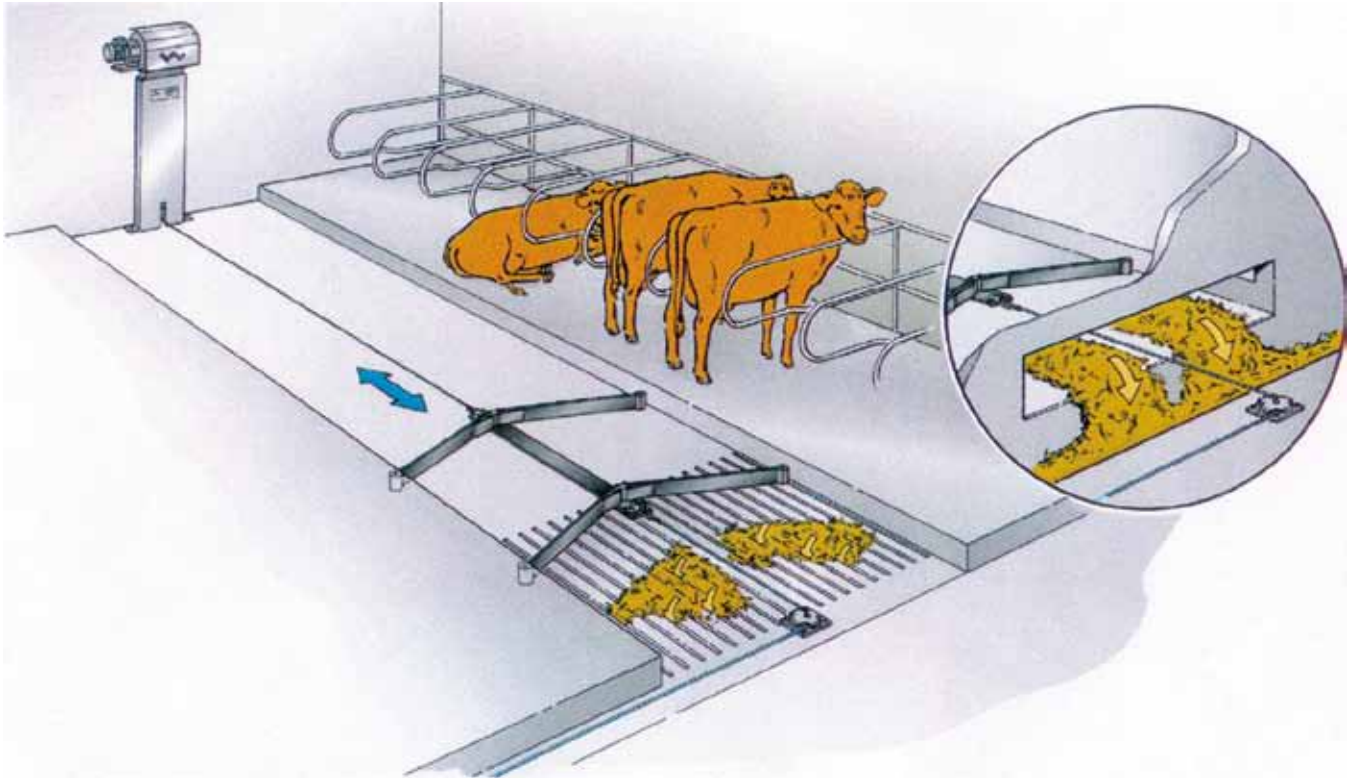

The Domino wire-type barn cleaners are self-tightening. This is because two drawing stations are always used as well as a combination of rope and wire. The rope is the flexible part and the wire is the stable part.

The delta and slat scrapers run directly on the floor. The scrapers are controlled by the walls of the channel. The moderate scraping speed makes the cleaner ideal for loose housing barns, as it does not interfere with the movements of untethered animals. The cleaner can be supplied with a timer for automatic control or with a manual control unit.


The scrapers can be used on concrete as well as on rubber-covered floors. For use on rubber-covered floors the scrapers are fitted with a rubber diaphragm reducing scraper friction against the floor, thus ensuring a long service life of the floor.

The Domino wire-type barn cleaners are adapted to the individual project to ensure that the optimal solution is found.

Maintainable, reliable and easy to operate.

Data: Delta

	No.	A	B	C
		Station 0,55KW	54092	2500
Delta	64010	120	0-2000	2000
Delta	64011	120	2000-2500	2000
Delta	64012	120	2500-3000	2000
Delta	64013	120	3000-3500	2000
Spalte	55010	70	0-2000	1500
Spalte	55011	70	2000-2500	1500
Spalte	55012	70	2500-3000	1500
Spalte	55013	70	3000-3500	1500
Delta	64020	80	220	250
Nylon tov 20 mm	64025			
Taifun wire 12 mm	64026			
Spalte 1	64030	190	380	210
Delta 3	64031	280	280	160



Station 0,55KW
(54092)



Delta 3
(64031)



Spalte 1
(64030)



Delta
(64020)




Taifun wire 12mm
(64026)



Nylon 20mm
(64025)



Delta
(64010/11/12/13)

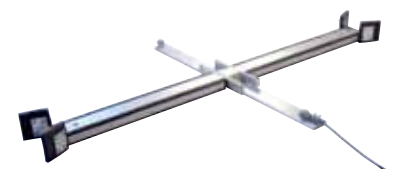

Spalte
(55010/11/12/13)